




双极化喇叭天线 MA-5000

Dual Polarization Measurement Antenna






Technical Specifications:

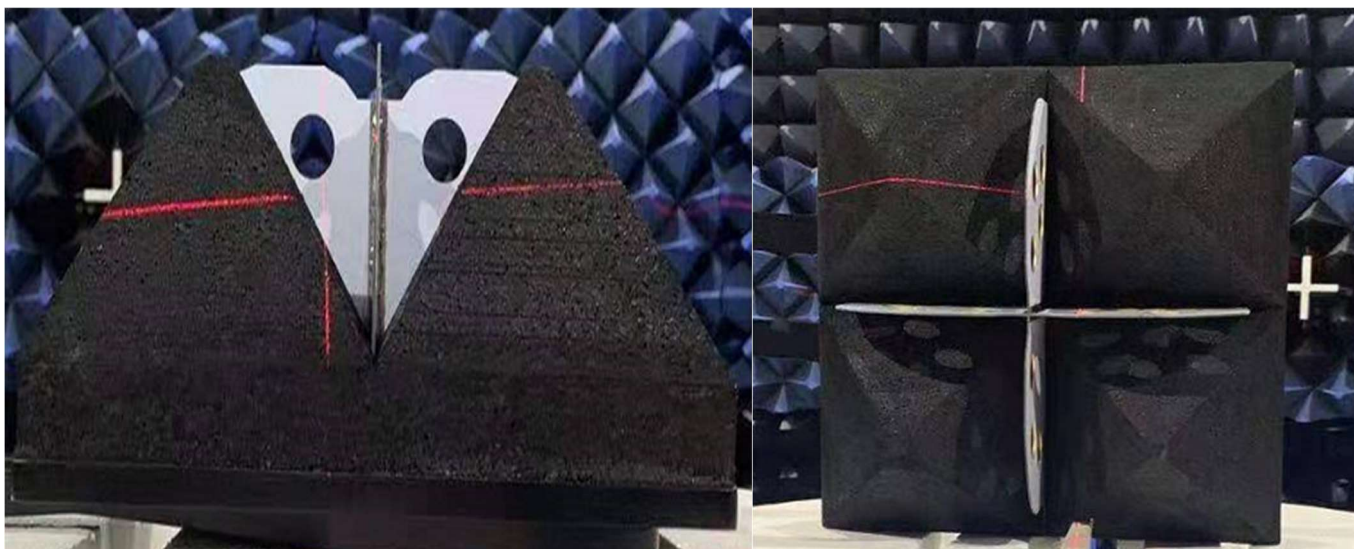


| | | | |
|----------------------------|--------------------------------|--------|--------|
| Frequency Range (GHz) | 0.6-7.5 | | |
| VSWR | 2(Typical) | | |
| Gain (dB) | 2(Typical) | | |
| | Fre | | |
| | 0.72GHz | 3GHz | 5.9GHz |
| 3dB Beamwidth | 59.3° | 78.4° | 156° |
| Isolation | 23.5dB | 28.3dB | 25.5dB |
| Connector Type | SMA (F) | | |
| Maximum RF Input Power (W) | 50 CW | | |
| Polarization Type | H-Polarization/ V-Polarization | | |

Typical Performance vs. Frequency


1. VSWR

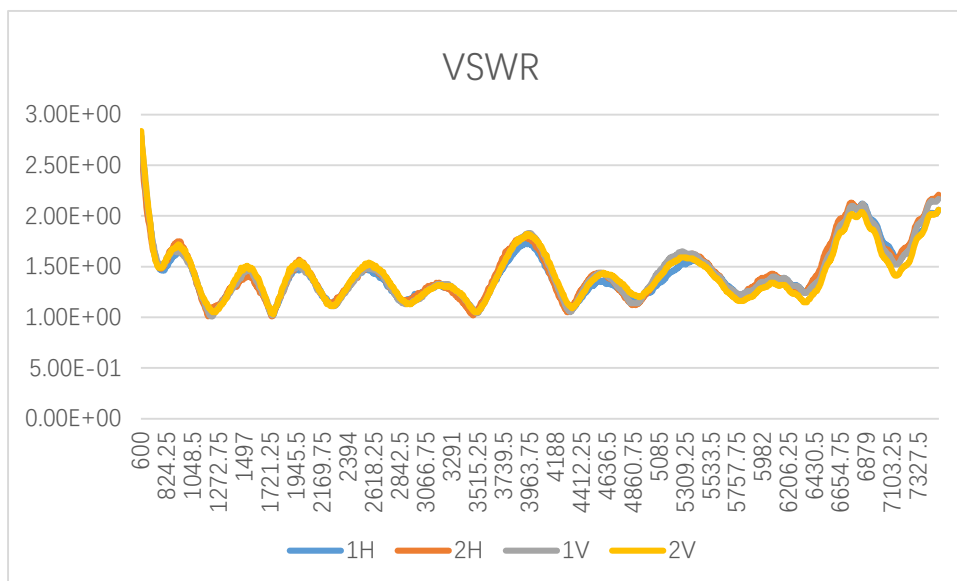

2. 3dB Beamwidth&Isolation

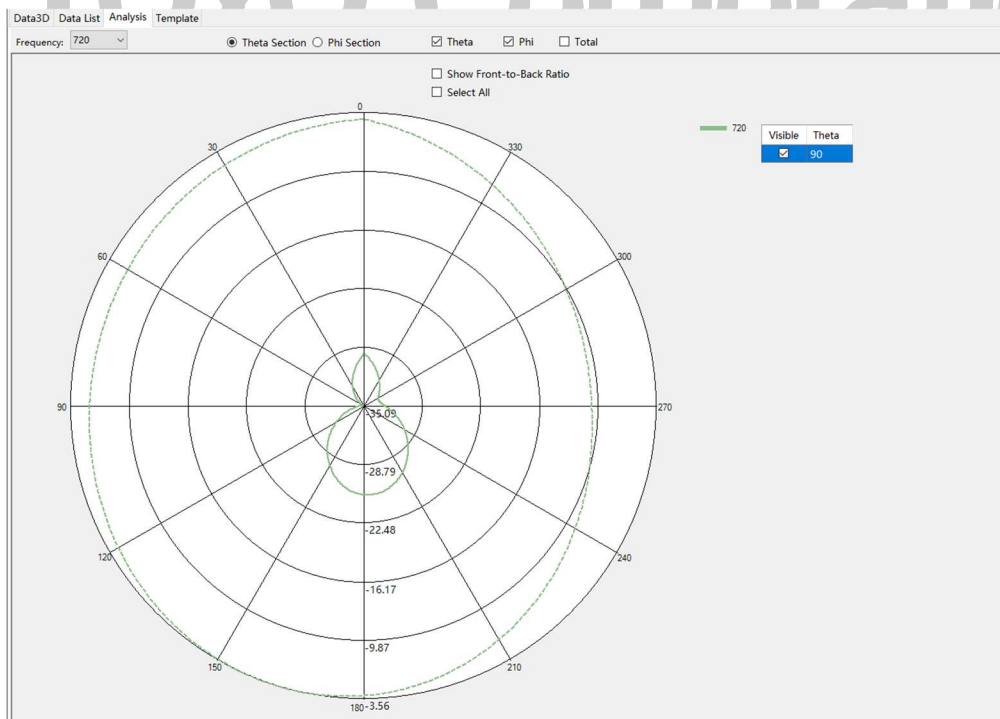


Fre=720MHz

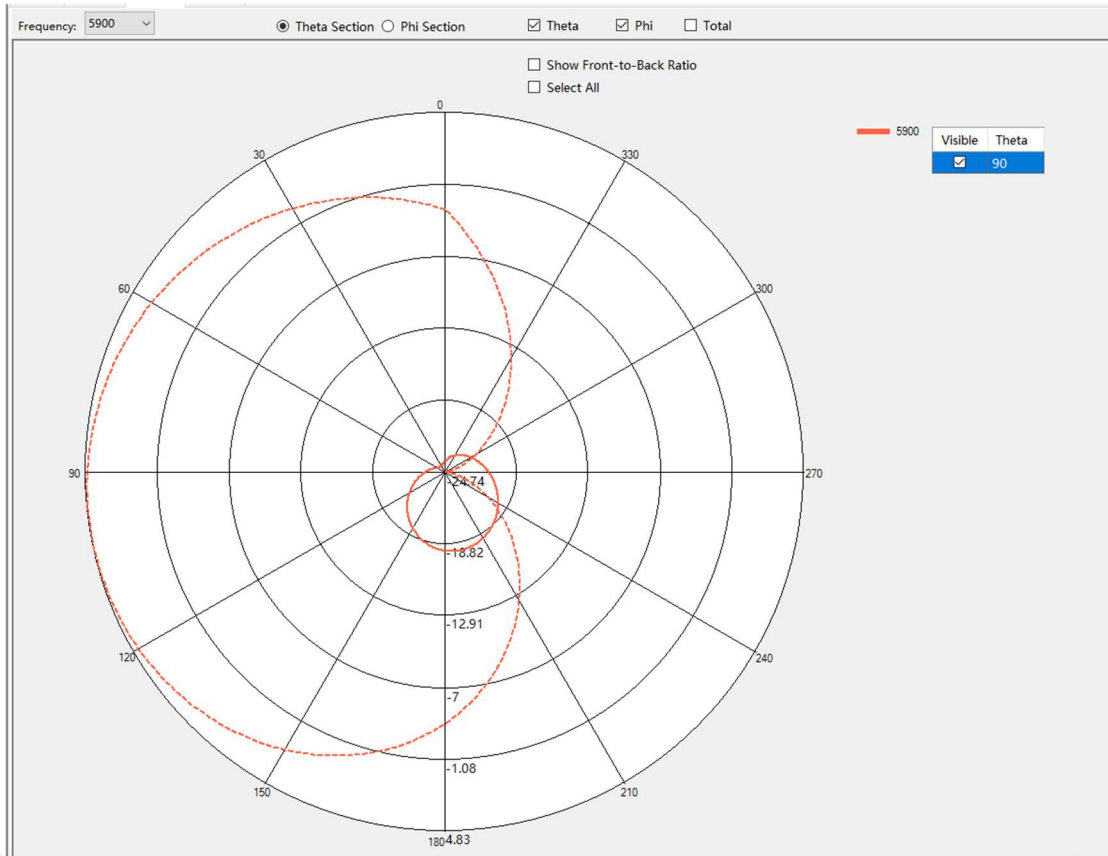

TOYO Corporation

Fre=5.9GHz

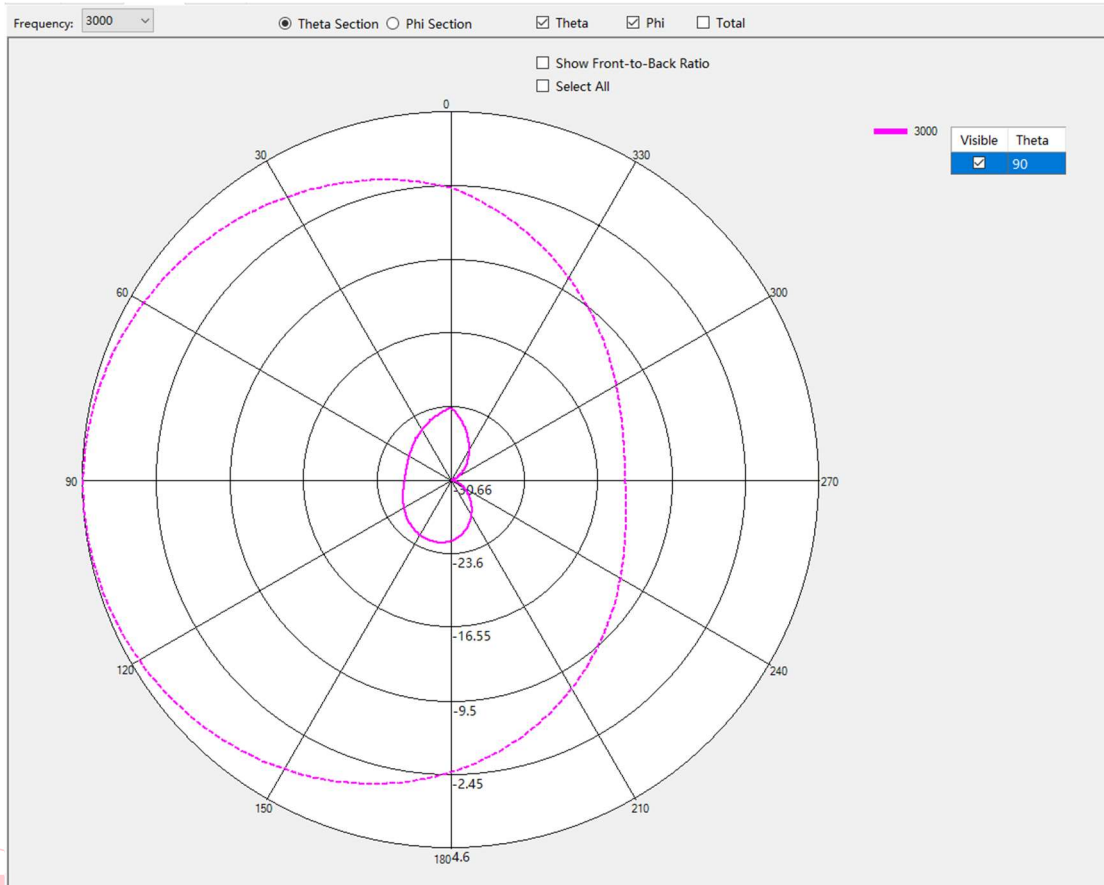

TOYO Corporation

Fre=3GHz

更多更详细产品信息，敬请垂询。

中国公司总部：

东扬精测系统（上海）有限公司

地址：上海市静安区梅园路 228 号 企业广场 310 室

电话：021-6380-9633

传真：(+86) 021-6380-9699

邮箱：emc@toyochina.com.cn

网址：www.toyochina.com.cn

北京分公司：

地址：北京市朝阳区望京北路 9 号 叶青大厦 C 座 100,102 室



电话：010-6439-2938

TOYO Corporation



产品如有更改，恕不另行通知